

PRODUCT CATALOG



**FIERCELY
INDEPENDENT.**

WWW.BOBCATMOWERS.COM.AU

FIERCELY INDEPENDENT.

I don't need someone pointing out the tough spots for me. I know them like the back of my hand. All I need is equipment that works how, when and where I need it to. Not bells and whistles. Just a rugged, reliable machine backed by a warranty I can depend on. Any mower I buy has got to work on my terms because this is my turf. And there's only one way I work: Fiercely Independent.

BUILT LIKE A TANK. NIMBLE LIKE A CAT.

Combining heavy-gauge steel with sturdy American craftsmanship means BOB-CAT® mowers can take abuse that would send other machines into early retirement. It's just the only way to build a machine that works as hard as you do. And with dual-tube frame construction on our newest, next-generation machines, there's simply no match for BOB-CAT's durability.

CUTS LIKE A STRAIGHT RAZOR

Make them say "Whoa!" when they look at your handiwork. Our decks feature steel blades that slice—rather than chop—giving you vacuum lift, a cleaner cut and more even clipping dispersal for your trademark finish. You're the boss—and when you've got a BOB-CAT®, it's not your job to worry about the details. When it comes to quality of cut, we've got you covered.



WORKS FOR YOU

BOB-CAT® machines are built for one reason: to cut grass. Simple controls let you show turf who's boss as soon as that BOB-CAT® is yours. Our new rotating bumper and hitch system* makes maintenance and service quick and easy, because you don't profit from downtime. And we'll always put our money where our mouth is—as proven by our industry-leading MOW WITH CONFIDENCE™ limited warranties.

* Swing-away bumper and hitch system only on select models, see product spreads for details.



FIERCELY INDEPENDENT.

CRZ™ 42", 48", 52"

REASONS TO OWN:

POWERFUL ENGINE PERFORMANCE

Commercial-grade performance with the powerful Kawasaki® FR series engine.

COMMERCIAL-GRADE TRANSMISSION

Hydro-Gear® ZT-2800® Hydrostatic Transaxles for heavy-duty output torque with productive ground speeds up to 7 MPH / 11 KPH. Serviceable with oil filter.

HIGH-BACK SEAT

Adjustable, high-back seat with spring-dampened suspension and armrests.

FUEL TANK

Rugged, roto-molded, impact-resistant fuel tank with 6-gallon (22.7L) capacity.

HEAVY DUTY, TUBULAR FRAME

Lightweight, yet ruggedly constructed, 1.5- x 2.5-inch steel-tube frame.

COMMERCIAL-INSPIRED CUTTING

42, 48, and 52inch TufDeck™ 10-gauge Cutting System with durable, cast-aluminum spindle assemblies.

WHAT YOU REALLY GET:

More power every time you fire up the mower—job after job.

Smooth and simple operation to temper your tough mower.

Comfort just as good as your lounge so you can sit back, enjoy the ride and get the job done right.


Hours of juice behind you—because you don't rest 'til it's all done right.

Relentless performance on uneven terrain—without any frame flexing.

A mower built to handle everything your lawn dishes out.

Backed by our industry-leading 5-year / 500 hour
MOW WITH CONFIDENCE™ limited warranty.

MOW LIKE A PRO

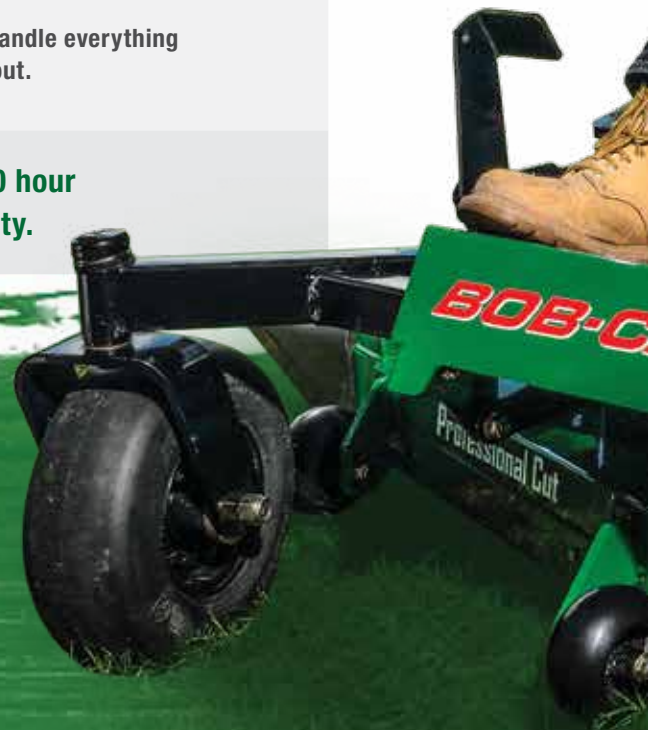



MOW WITH
5 YEAR LIMITED
WARRANTY
CONFIDENCE

FIERCELY INDEPENDENT.

XRZ™ Pro 48", 52", 61" & XRZ™ 48", 52"

REASONS TO OWN:

PROFESSIONAL ENGINE PERFORMANCE

Kawasaki® FX (XRZ™ Pro) and FR (XRZ™) series engines for reliable performance.

COMMERCIAL-GRADE TRANSMISSION

Hydro-Gear® ZT-3400® (XRZ™ Pro) or Hydro-Gear® ZT-3100® (XRZ™) Hydrostatic Transaxles deliver ground speeds up to 8 MPH/12 KMH.

LARGE FUEL TANK CAPACITY

Rugged, roto-molded, impact-resistant fuel tank with 6-gallon (22.7L) capacity.

TOUGH MOWER DECKS

48,52 or 61-inch 10-gauge TufDeck™ Pro (XRZ™ Pro) or 48, 52-inch TufDeck™ (XRZ™) Cutting System with professional-grade, cast-aluminum spindle assemblies.

HEAVY DUTY, TUBULAR FRAME

Lightweight, yet ruggedly constructed, 1.5- x 2.5-inch steel-tube frame.

OPTIMUM USER EXPERIENCE

Ergonomically engineered performance controls and high-back, spring suspension seats.

WHAT YOU REALLY GET:

Reliable, smooth-running, professional-grade engine performance.

Smooth operation and maneuverability to tackle turf faster.

No shortage of fuel to stop you from filling up your schedule.

Exactly what you need when it's time to cut grass down to size.

Unstoppable durability and no frame flexing—no matter what you're up against.

All-day comfort paired with effortless control.

Backed by our industry-leading 6-year / 1,000 hour (XRZ™ Pro) or 600 hour (XRZ™) MOW WITH CONFIDENCE™ limited warranty.

LET THE JONESES KEEP UP WITH YOU





XRZ™

MOW WITH
6 YEAR LIMITED
WARRANTY
CONFIDENCE™

FIERCELY INDEPENDENT.

XRZ™ Pro RS 48", 52", 61"

REASONS TO OWN:

POWERFUL ENGINE PERFORMANCE

Fully equipped with a powerful Kawasaki® FX series engine.

COMMERCIAL-GRADE TRANSMISSION

Superior transmission capabilities with the durable Hydro-Gear® ZT-3400® Hydrostatic Transaxles.

10 MPH

Productive ground speeds up to 10 MPH / 16 KM/H with 23-inch Zero-T drive tires.

DUAL FUEL TANKS

Rugged, roto-molded, dual fuel tanks with 9.5-gallon (36L) capacity.

PRO-GRADE CUTTING SYSTEM

48-, 52- or 61-inch 10-gauge TufDeck™ Pro Cutting System with professional-grade, 6-bolt, cast-aluminum spindle assemblies.

OPTIMUM USER EXPERIENCE

Ergonomically engineered performance controls and high-back, full-mechanical suspension seat.

WHAT YOU REALLY GET:

Inexhaustible power—because there's no rest for the fiercely independent.

Maximum output torque and smooth operation.

A fast track to the best-cut lawn on the block.

Forget wasting time with fueling—this fuel capacity has you covered.

Show the pros how it's done by making your own mark.

A chance to sit back, enjoy the ride and get the job done right.

Backed by our industry-leading 6-year / 1,200 hour
MOW WITH CONFIDENCE™ limited warranty.

OWN YOUR TURF, ON YOUR
TERMS



MOW WITH
6 YEAR LIMITED
WARRANTY
CONFIDENCE™

FIERCELY INDEPENDENT.

QuickCat™ 4000 36", 48"

REASONS TO OWN:

POWERFUL ENGINE PERFORMANCE

Fully loaded with a powerful Kawasaki® FX series engine.

TOOL-FREE CONTROLS

Smooth, dampened controls with tool-free, adjustable tracking.

SERVICEABILITY

Access to internal components with our tethered, removable operator pad.

DURADECK™ CUTTING SYSTEM

Ruggedly equipped with our heavy-duty 36-, and 48-inch dual layered 10-gauge DuraDeck™ with patent pending Air-Gap baffles featuring cast-iron spindles on the 48-inch decks.

VIBRATION-DAMPENED PLATFORM

Radial-bearing suspension (no mechanical springs) reduces bouncing for a smooth, comfortable ride.

UNMATCHED STABILITY

Optimal operator-station design and in-frame fuel tank for excellent "center of mass" stability; flip-up operator platform allows walking when necessary.

DUAL-SPEED CONTROL

Optimized control for you and your crew with 2-speed control—"cut" and "transport." Also, with adjustable tool-less speed reference bar to set ideal maximum speed for operators.

WHAT YOU REALLY GET:

The performance you need to power through the workday—because downtime isn't an option.

Your turf. Your terms. You are in control—now more than ever before!

Built like you'd build them with industry-leading serviceability, so you don't have to tinker around and can stay focused when mowing is job one.

One of our most reliable decks to let you tackle even the toughest, tallest turf with ease.

All-day operator comfort.

Stand-on stability and agility on uneven ground and for traversing hills and slopes with ease.

The right speeds for what you need—up to 8 MPH (12.8 KM/H) cutting; up to 10.5 MPH (16.8 KM/H) transport.

Backed by our industry-leading 6-year / 2,000 hour
MOW WITH CONFIDENCE™ limited warranty.

Deck Hand-Lift Assist

STAND UP TO DOWNTIME



Speed Reference Bar

Flip-Up Operator Platform

MOW WITH
6 YEAR LIMITED WARRANTY
CONFIDENCE

FIERCELY INDEPENDENT.

ProCat™ 6000 52” & ProCat™ 6000 MX 61”

REASONS TO OWN:	WHAT YOU REALLY GET:
POWERFUL ENGINE PERFORMANCE Kawasaki® FX series engine options, FX730V 52” & FX850V 61”*, assure peak performance.	The power you need to get the job done, day after day.
COMMERCIAL-GRADE TRANSMISSIONS Hydro-Gear® ZT-4400™ Transaxles feature ground speeds up to 12 MPH /19.3 KPH.	A chance to step up your game every time you step on the gas.
ROTATING BUMPER & HITCH Access to internal components with the rotating bumper & hitch.*	A mower so easy to maintain, your kid could do it.
BULLNOSE AIRFX™ DECK Deep-profile, 52- or 61-inch, bullnose dual layered 10-gauge AirFX™ deck equipped with rugged, cast-iron spindles with double-row bearings and patent pending. Air-Gap baffles. (See page 17.)	A kicked-up quality of cut, lifting grass so steel blades can cut it down clean as a straight razor.
DUAL-TUBED FRAME Larger, robust, ultra-stable, dual-tubed frame for increased durability.	Virtually indestructible support to mow through the toughest turf with no problem.
OPTIMUM USER EXPERIENCE Comfort, power and performance all within your reach from the center of the deluxe suspension seat, almond-shaped handles and smooth responsive controls.	Controls and comfort—because you’re the only one calling the shots around here.

**Backed by our industry-leading 6-year / 2,750 hour
MOW WITH CONFIDENCE™ limited warranty.**

* Available only on the ProCat™ 6000MX.
The MX difference: more horsepower, rotating bumper, 6-spoke wheels, rear hitch.

BECAUSE YOU’RE IN THIS TO MAKE MONEY



ProCat™ 6000

Deck Hand-Lift Assist



FIERCELY INDEPENDENT.

Predator-Pro™ 7000 61", 72"

REASONS TO OWN:

HIGH-PERFORMANCE ENGINE

Kawasaki® FX1000V engine designed to provide major, commercial-grade strength.

ROTATING BUMPER & HITCH

Access to internal components with the rotating bumper & hitch.

DUAL FUEL TANKS

Armed with new, 15-gallon (56.7L) capacity, dual fuel tanks.

COMMERCIAL-GRADE TRANSMISSIONS

Rugged Hydro-Gear® 2-speed ZT-5400 Hydrostatic Transaxles with a transport speed up to 19 MPH /30.5 KPH.

DUAL-TUBED FRAME

Larger, robust, ultra-stable, dual-tubed frame for increased durability for traversing even the toughest of turfs.

BULLNOSE AIRFX™ DECK

61-inch or 72-inch bullnose AirFX™ dual layer 10-gauge deck with Air-Gap baffles offers efficient airflow and superior vacuum lift; rugged, cast-iron spindles with double-row bearings assure reliable performance. (See page 17.)

OPTIMUM USER EXPERIENCE

Comfort, power and performance all within your reach from the center of the deluxe suspension seat, almond-shaped handles and smooth responsive controls.

**Backed by our industry-leading 6-year / 2,750 hour
MOW WITH CONFIDENCE™ limited warranty.**

WHAT YOU REALLY GET:

All the pro-grade power you can handle and more, to get more jobs done—and done right.

Fast access to get in there, get out and on to the next job.

All the juice you need for hours and hours of unstoppable mowing power.

Getting you from point A to point B faster than ever for more cash in your pocket—plain and simple.

A machine meant to withstand a beating that would send others back to the shop.

Makes grass stand at attention before steel blades cut it down to size.

The kind of ride someone in your position deserves.

THE BEST IN THE BUSINESS





Deck Hand-Lift Assist

Swing-Out Bumper

MOW WITH
6 YEAR LIMITED
WARRANTY
CONFIDENCE™

FIERCELY INDEPENDENT.

VICIOUSLY EFFECTIVE MOWING

ENGINEERED TO KEEP YOU UNSTOPPABLE

No matter which mower you choose, **BOB-CAT®** cutting systems are engineered to provide unstoppable cutting power. Every detail of our decks is precision-designed to knock grass into next week. Whether it's accelerating airflow through our patented baffle systems, busting up clumps of grass in the cutting chamber or shooting clippings out in an even pattern, **BOB-CAT®** understands what it takes to get a high-quality cut. In fact, our high-vacuum decks eliminate negative-pressure pockets, lifting the grass up for a pristine cut. Available in widths up to 72 inches, these heavy-gauge steel powerhouses work every bit as hard as you do.

SUPERIOR DISCHARGE WITH DURADECK™

The DuraDeck™: Tough enough to handle everything commercial jobs dish out:

- Double-Wave™ or patent pending **Air-Gap** bolt-on baffles to increase airflow throughout the deck (varies by model).
- Even clipping dispersal.
- Adjustable front lip optimizes cutting for varying conditions and grass types.
- Limited lifetime deck, deck cradle and engine deck warranty.
- Dual 10-gauge layers, 3 and 7-gauge reinforcements.

RUGGED DURABILITY WITH TUFDECK™ PRO AND TUFDECK™

The TufDeck™ Pro and TufDeck™: Tough and reliable for a perfectly manicured finish—every time:

- Cast-aluminum spindles for reliability.
- Constructed with heavy-gauge, fabricated steel.
- Improved vacuum lift.
- Easily replaceable, bolt-on front baffles.
- Adjustable front lip optimizes cutting for varying conditions and grass types.
- 10-gauge formed, 3 and 7-gauge reinforcements, 7-gauge spindle support plates.

OPTIMUM MOWING WITH BULLNOSE AIRFX™ CUTTING SYSTEMS

The AirFX™: A full-scale system designed to keep you a cut above the rest:

- Deeper profile for improved vacuum lift.
- Newly engineered, bolt-on, replaceable, patent pending **Air-Gap** baffles for more efficient airflow and enhanced serviceability.
- Bullnose design that stands the grass up before it reaches the mower blades.
- Cast-iron spindles for increased durability.
- Even clipping dispersal.
- Improved deck cleanliness.
- Limited lifetime deck, deck cradle and engine deck warranty.
- Adjustable front lip optimizes cutting for varying conditions and grass types.
- Dual 10-gauge layers, 3 and 7-gauge reinforcements.



Deep deck design with patent pending Air-Gap baffles increases airflow, delivers a pristine cut, and provides a cleaner deck at the end of the day.



Clean Finish—Powerful airflow aggressively shoots clippings out the extra-large discharge chute.

See the AirFX™ deck in action at bobcatturf.com/decks



FIERCELY INDEPENDENT.

LEAVE NO TRACE

IT'S A DIRTY JOB, BUT SOMEONE'S GOTTA DO IT.

Going in there and getting your hands dirty is part of the job, but our BOSS-Vac™ Collection Systems make cleanup effortless and efficient, so you can move on to the next lawn leaving nothing but the best cut ever seen. The 12bu Dump from seat or collection bag options, designed especially for Predator-Pro™ 7000 and ProCat™ series mowers, or the 8Bu for the CRZ, XRZ or XRZ Pro options, these debris collectors let any pro leave a striking finish.



BOB-CAT® Parts & Accessories

	CRZ™	XRZ™, XRZ™ Pro, XRZ™ Pro RS	QuickCat™ 4000	ProCat™ 6000, 6000MX	Predator-Pro™ 7000
Mulching Baffle Kit: Eliminator Blades	48", 52"	✓	✓	✓	61"
Mulching Baffle Kit: Medium Lift Blades	42"				
Eco Plate	✓	✓	✓	✓	✓
Grass Catcher: Poly-Dump, 3.75 or 5.0 bushel	✓	✓	✓	✓	61"
BOSS-Vac™ Pro 12-bushel Collection System				6000 and 6000MX	✓
8-bushel Collection System	✓	✓			
ZT Hitch Kit		✓		6000	✓
No-Flat Caster Wheel Options	✓	✓	✓	✓	
61-inch Wide Track Kit: Widens Track on Unit				✓	✓
Magnetic Light Kit, 12V	✓	✓	✓	✓	✓
Light Kit, Footplate				✓	

MY MOWER DESERVES
THE BEST

FIERCELY INDEPENDENT.

CRZ™**XRZ™**

	42"	48"	52"	48"	52"
MODEL NUMBER	942607	942604	902605	942610	942611
ENGINE					
Model	Kaw FR651V	Kaw FR651V	Kaw FR651V	Kaw FR651V	Kaw FR691V
Displacement (cc)	726	726	726	726	726
Fuel Capacity (gal)	6 (22.7L)	6 (22.7L)	6 (22.7L)	6 (22.7L)	6 (22.7L)
Air Filter	Single Element				
ELECTRICAL					
Charging System (amp)	15	15	15	15	15
Clutch (ft lb)	105	105	105	125	125
DECK					
Mower Deck	TufDeck™ 10-gauge Top with 7-gauge Spindle Supports; 7-gauge Side Skirts				
Leading Edge	Adjustable, 2 Positions				
Width (in)	42	48	52	48	52
Adjustable Anti-Scalp Rollers	2	3	3	3	3
Cutting Height (in)	1.5-4.875	1.5-4.875	1.5-4.875	1.5-4.875	1.5-4.875
Blade Tip Speed	18809 fpm @ 3550 Engine rpm	17365 fpm @ 3550 Engine rpm	18142 fpm @ 3550 Engine rpm	17365 fpm @ 3550 Engine rpm	18142 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer				
FRAME					
Front & Rear	Welded, 7-gauge Steel; 1.5- x 2.5-inch Steel Tubing				
Machine Length (in)	82 (2082mm)	80 (2032mm)	80 (2032mm)	80 (2032mm)	80 (2032mm)
Machine Weight—Wet (lb)	684 (310kg)	736 (333kg)	752 (341kg)	736 (333kg)	752 (341kg)
ROPS Folding	Optional			Optional	
TRANSMISSION					
Type	HG ZT-2800 Hydrostatic Transaxles			HG ZT-3100 Hydrostatic Transaxles	
Pump Displacement (cc)	10	10	10	10	10
Oil Capacity (qt)	4 (3.7L)	4 (3.7L)	4 (3.7L)	4 (3.7L)	4 (3.7L)
Forward Speed (mph)	0-7 (11km/h)	0-7 (11km/h)	0-7 (11km/h)	0-8 (12km/h)	0-8 (12km/h)
Reverse Speed (mph)	0-3	0-3	0-3	0-3.5	0-3.5
WHEELS					
Drive Wheel Size	20 x 8.0-10	20 x 10.0-10	20 x 10.0-10	22 x 11.0-10	22 x 11.0-10
Front Caster Wheel Size	13 x 5.0-5	13 x 5.0-5	13 x 5.0-5	13 x 5.0-6	13 x 5.0-6
Caster Arm Attachment	Welded to Frame	Welded to Frame	Welded to Frame	Welded to Frame	Welded to Frame
SEAT					
Description	High-Back, Sprung Seat				
Fore-Aft Adjustment	Seat Slide Lever				
WARRANTY	5-year / 500 hour MOW WITH CONFIDENCE™ limited warranty			6-year / 600 hour MOW WITH CONFIDENCE™ limited warranty	

XRZ™ Pro

XRZ™ Pro RS

	48"	52"	61"	48"	52"	61"
MODEL NUMBER	942620	942621	942622	942630	942631	942632
ENGINE						
Model	Kaw FX651V	Kaw FX691V	Kaw FX730V	Kaw FX651V	Kaw FX691V	Kaw FX730V
Displacement (cc)	726	726	726	726	726	726
Fuel Capacity (gal)	6 (22.7L)	6 (22.7L)	6 (22.7L)	9.5 (35.9L)	9.5 (35.9L)	9.5 (35.9L)
Air Filter	Dual-Stage Canister			Dual-Stage Canister		
ELECTRICAL						
Charging System (amp)	15	15	15	15	15	15
Clutch (ft lb)	125	125	125	125	125	125
DECK						
Mower Deck	TufDeck™ Pro 10-gauge Top with 7-gauge Spindle Supports; 7-gauge Side Skirts					
Leading Edge	Adjustable, Front Lip Standard					
Width (in)	48	52	61	48	52	61
Adjustable Anti-Scalp Rollers	3	3	7	3	3	7
Cutting Height (in)	1.5–4.875	1.5–4.875	1.5–4.875	1.5–4.875	1.5–4.875	1.5–4.875
Blade Tip Speed	17365 fpm @ 3550 Engine rpm	18142 fpm @ 3550 Engine rpm	18809 fpm @ 3550 Engine rpm	17365 fpm @ 3550 Engine rpm	18142 fpm @ 3550 Engine rpm	18809 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer					
FRAME						
Front & Rear	Welded, 7-gauge Steel; 1.5- x 2.5-inch Steel Tubing					
Machine Length (in)	80 (2032mm)	80 (2032mm)	82 (2082mm)	80 (2032mm)	80 (2032mm)	82 (2082mm)
Machine Weight—Wet (lb)	758 (343kg)	774 (351kg)	817 (370kg)	773 (350kg)	789 (357kg)	832 (377kg)
ROPS Folding	Optional			Standard		
TRANSMISSION						
Type	HG ZT-3400 Hydrostatic Transaxles					
Pump Displacement (cc)	12	12	12	12	12	12
Oil Capacity (qt)	4	4	4	4	4	4
Forward Speed (mph)	0-8 (12km/h)	0-8 (12km/h)	0-8 (12km/h)	0-10 (16km/h)	0-10 (16km/h)	0-10 (16km/h)
Reverse Speed (mph)	0-3.5	0-3.5	0-3.5	0-3.5	0-3.5	0-3.5
WHEELS						
Drive Wheel Size	22 x 11.0-10	22 x 11.0-10	22 x 11.0-10	23 x 10.5-12	23 x 10.5-12	23 x 10.5-12
Front Caster Wheel Size	13 x 5.0-6	13 x 5.0-6	13 x 5.0-6	13 x 6.5-6	13 x 6.5-6	13 x 6.5-6
Caster Arm Attachment	Welded to Frame	Welded to Frame	Welded to Frame	Welded to Frame	Welded to Frame	Welded to Frame
SEAT						
Description	High-Back, Sprung Seat			High-Back, Full-Mechanical Suspension Seat		
Fore-Aft Adjustment	Seat Slide Lever					
WARRANTY	6-year / 1,000 hour MOW WITH CONFIDENCE™ limited warranty			6-year / 1,200 hour MOW WITH CONFIDENCE™ limited warranty		

QuickCat™ 4000

	36"	48"
MODEL NUMBER	912360	912480
ENGINE		
Model	Kaw FX600V	Kaw FX651V
Displacement (cc)	603	726
Fuel Capacity (gal)	5.1 (19.3L)	6.5 (24.6L)
Air Filter	Dual Element	
ELECTRICAL		
Charging System (amp)	15	15
Clutch (ft lb)	125	200
DECK		
Mower Deck	DuraDeck™ Cutting System	
Leading Edge	Adjustable, Front Lip Standard	
Width (in)	36	48
Adjustable Anti-Scalp Rollers	3	4
Cutting Height (in)	1.5–4.5	1.5–4.5
Blade Tip Speed	17600 fpm @ 3550 Engine rpm	17800 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer	
FRAME		
Front & Rear	Welded, 7-gauge Steel; 1.5- x 2.5-inch Steel Tubing	
Machine Length (in)	64 (1625mm)	64 (1625mm)
Machine Weight—Wet (lb)	800 (362kg)	961 (435kg)
TRANSMISSION		
Type	HG ZT-3100 Hydrostatic Transaxles	HG ZT-3400 Hydrostatic Transaxles
Pump Displacement (cc)	10	12
Oil Capacity (qt)	4	4
Forward Speed (mph)	0–9 (9km/h)	0–10.5 (16 km/h)
Reverse Speed (mph)	0–3.5 (5.6km/h)	0–3.5 (5.6km/h)
WHEELS		
Drive Wheel Size	20 x 8.0–10	23 x 8.5–12
Front Caster Wheel Size	11 x 4.0–5	13 x 5.0–6
Caster Arm Attachment	Bolt-On	Bolt-On
OPERATOR PLATFORM		
Adjustment	Flip Up and Latch	
Rider Pad	Tethered, Removable for Service	
Vibration Isolation	Dampened	
WARRANTY	6-year / 2,000 hour MOW WITH CONFIDENCE™ limited warranty	

ProCat™ 6000 & 6000MX

Predator-Pro™ 7000

	52"	61"	61"	72"
MODEL NUMBER	9996003	9996005	9997001	9997004
ENGINE				
Model	Kaw FX730V	Kaw FX850V	Kaw FX1000V	Kaw FX1000V
Displacement (cc)	726	852	999	999
Fuel Capacity (gal)	15 (56.7L)	15 (56.7L)	15 (56.7L)	15 (56.7L)
Air Filter	Canister Air Filter		Canister Air Filter	
ELECTRICAL				
Charging System (amp)	15	15	15	15
Clutch (ft lb)	225	225	250	250
DECK				
Mower Deck	AirFX™ Cutting System		AirFX™ Cutting System	
Leading Edge	Adjustable, Front Lip Standard		Adjustable, Front Lip Standard	
Width (in)	52	61	61	72
Adjustable Anti-Scalp Rollers	6	6	6	7
Cutting Height (in)	1-5.5	1-5.5	1-5.5	1-5.5
Blade Tip Speed	18586 fpm @ 3550 Engine rpm	18500 fpm @ 3550 Engine rpm	18500 fpm @ 3550 Engine rpm	18152 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer			
FRAME				
Front & Rear	Welded, 0.25-inch, 7-gauge Steel; 1.5- x 2.5-inch Steel Tubing		Welded, 0.25-inch, 7-gauge Steel; 1.5- x 2.5-inch Steel Tubing	
Machine Length (in)	83 (2108mm)	83 (2108mm)	87 (2209mm)	87 (2209mm)
Machine Weight—Wet (lb)	1371 (621kg)	1464 (664kg)	1500 (680kg)	1541 (699kg)
ROPS Folding	Standard		Standard	
TRANSMISSION				
Type	HG ZT-4400 Hydrostatic Transaxles		HG ZT-5400 2-Speed Hydrostatic Transaxles	
Pump Displacement (cc)	12	12	16	16
Oil Capacity (qt)	4.5 each	4.5 each	5.9 each	5.9 each
Forward Speed (mph)	0-12 (19.3km/h)	0-12 (19.3km/h)	0-19* (30km/h)	0-19* (30km/h)
Reverse Speed (mph)	0-4 (6.4km/h)	0-12 (19.3km/h)	0-7.5** (12km/h)	0-7.5** (12km/h)
WHEELS				
Drive Wheel Size	24 x 10.5-12	24 x 12.0-12, 6-Spoke	26 x 12.0-12, 6-Spoke	26 x 12.0-12, 6-Spoke
Front Caster Wheel Size	13 x 6.5-6	13 x 6.5-6	15 x 6.5-6, No-Flat	15 x 6.5-6, No-Flat
Caster Arm Attachment	Bolt-On	Bolt-On	Bolt-On	Bolt-On
SEAT				
Description	High-Back, Full-Mechanical Suspension Seat		Extra-High Back, Full-Mechanical Suspension Seat	
Fore-Aft Adjustment	Seat Slide Lever		Seat Slide Lever	
WARRANTY	6-year / 2,750 hour MOW WITH CONFIDENCE™ limited warranty			


* 0-13 mph cutting; 13-19 mph transport

** 0-5 mph cutting; 5-7.5 mph transport



THE FREEDOM TO DO IT YOUR WAY

Like you, we don't worry about what others are doing or saying. We don't concern ourselves with popular notions of what a mower *is* or *was*. We only care about what it *can* be—precisely the same way you think about your business, your home, your life. That's why you choose BOB-CAT®. And that's why we work harder each day to meet your approval.

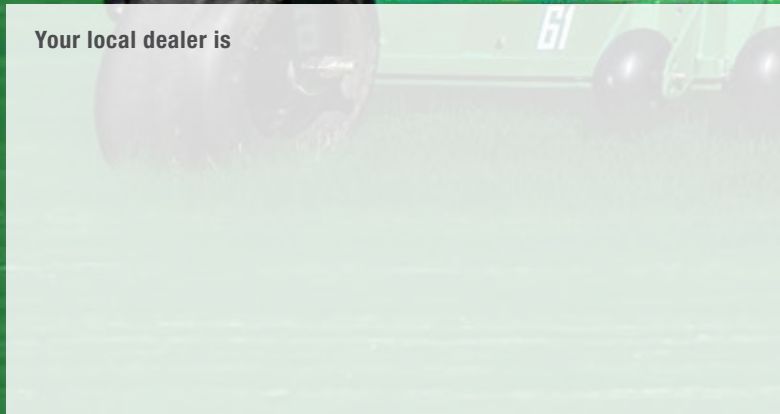

One BOB-CAT Lane | P.O. Box 0469
Johnson Creek, WI 53038-0469
1.866.469.1242 | bobcatturf.com



©2019 Schiller Grounds Care, Inc. All rights reserved.
P/N 900001A 12/2018